

QRHA284

2.6~3.95GHz, WR-284

Features:
* Broadband

Applications:
* Wireless
* Transceiver
* Laboratory Test
* Broadcast

Electrical

Frequency:	2.6~3.95GHz
Gain:	10, 15, 20dB
VSWR:	1.25 max. 1.5 max. (Connectorized)
Impedance:	50Ω

Mechanical

Interface:	WR-284
Flange:	FDP32
Connectors:	N Female
Material:	Aluminium

How To Order

QRHA284-X-Y

X: Gain in dB

Y: Connector type

Connector naming rules:


N - N Female

Examples:

To order an antenna, 2.6-3.95GHz, 10dB, WR-284, specify QRHA284-10.

Customization is available upon request.

Outline Drawings

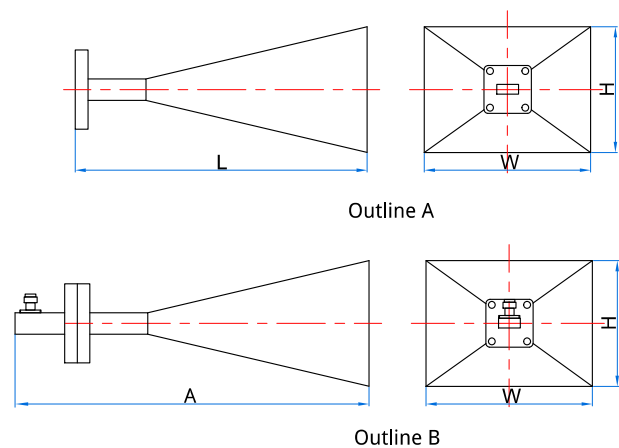

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Gain	L	W	H	A
10dB	98.8 [3.89]	109.9 [4.33]	83.7 [3.30]	160.3 [6.31]
15dB	146.2 [5.76]	225.6 [8.88]	170.6 [6.72]	207.7 [8.18]
20dB	506.6 [19.94]	419.4 [16.51]	330.2 [13]	568.1 [22.37]